


Installation Instructions 3 inch and Up



Step 1 Turn Water Off

Step 2 Locate A Flange Connection Nearest To The Water Meter On The Owners Side Of Meter

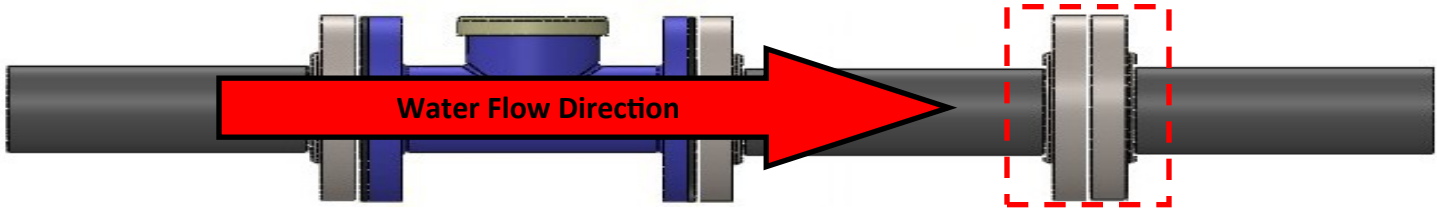

Step 3 Remove Bolts And Separate Flanges

Step 4 Remove Gaskets And Clean Flange Surface



Step 4 Install Gaskets (Sizes 3-6 inch Custom Gasket Included)

Step 5 Insert the H2minusO Into The Pipe Pointing the Body Towards The Users Side



Step 6 Re-Connect The Flange Connection

Step 7 Bleed Air From Line

Step 8 Turn Water On

Installation Complete